
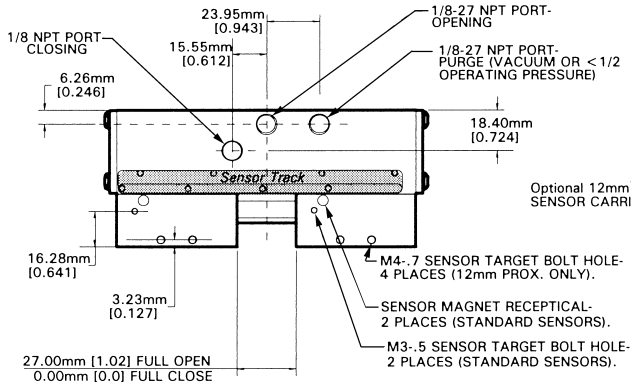


MODEL AL-2200

Specifications

Gripping Force—Open and Close, Each Jaw
 @ 100 psi (690 kPa) 100 lbs. (450N)
 Stroke 1.02 in. (26.0mm)
 Weight 2.39 lbs. (1.09kg)
 Operating Displacement 2.23 in³ (36 cm³)
 Maximum Operating Pressure 120 psi (830 kPa)

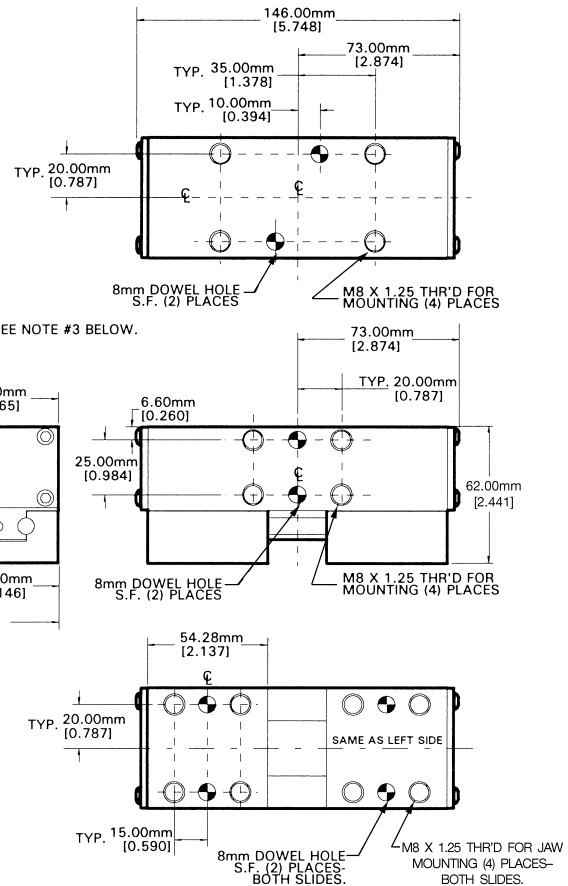

- NOTE:
1. ALL JAW AND GRIPPER MOUNTING HOLES ARE A MINIMUM OF ONE DIAMETER DEEP.
 2. ALL MAGNUM-450 JAW AND MOUNTING HOLES HAVE STAINLESS STEEL COIL INSERTS.
 3. WHEN USING CERTAIN 12mm PROX. SENSORS, SENSOR MAY EXTEND PAST THE MOUNTING SURFACE.

AL-2200 Active Fail Safe Accessory

The AFS accessory will assure that parts are not dropped should the pneumatic pressure fail. Either an encompassing jaw system or

jaws with compliance must be used with this accessory. Some movement of the jaws will occur as pressure fails.

Specifications

Closing Force @ Full Open 25 lbs. (111N)
 Closing Force @ Full Close 15 lbs. (67N)
 Weight 2.97 lbs. (1.35kg)
 Minimum Operating Pressure 60 psi (415kPa)

